


**SS2 AERATOR SYSTEM REQUIREMENTS - TORRENT**

The SS2 Aerator must be a Torrent to create a high volume, eruption of highly aerated water. The Torrent must use an aerator pump with a head protector. This shall allow the highest flow rate. The Torrent must provide maximum aeration and circulation with a low spray pattern height and deep suction from 24 inches or greater.

**SPRAY PATTERN SPECIFICATIONS**

Dimensions for water display must be: For \_\_\_\_\_ HP, performance height must be \_\_\_\_\_ feet. Diameter must be \_\_\_\_\_ feet. The pumping rate must be \_\_\_\_\_ GPM.

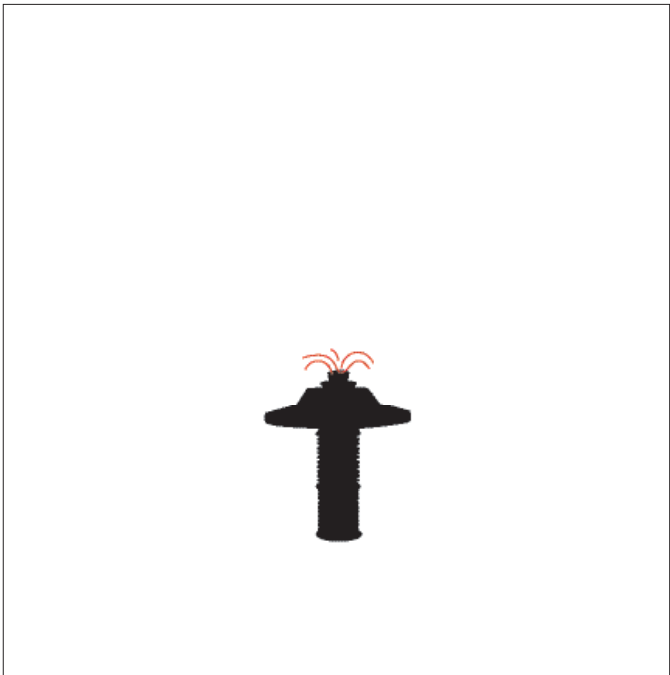

*Aqua Control SS2 Aerator - Torrent*

60 Hz									
HP	PERFORMANCE			DEPTH		AMPS			
	HT. (Feet)	DIA. (Feet)	GPM	MIN. WATER DEPTH		SINGLE PHASE	THREE PHASE		
				VERT.	HORZ.	230V	208V	230V	460V
1	1'	3'	500	32"	N/A	10	5	5	3
2	2'	4'	700	44"	N/A	13	9	9	5
3	2'	4'	800	44"	N/A	17	13	12	7
5	N/A	N/A	N/A	44"	N/A	28	21	20	11
7.5	N/A	N/A	N/A	48"	N/A	N/A	31	26	14

**SPRAY NOZZLE ASSEMBLY**

The nozzle must attach to the head which attaches to the upper tube assembly. The head supports the Aerator assembly on the float. The upper tube assembly shall be made from 6" engineered SDR 35 PVC for toughness and corrosion resistance. The 6" size matches the pump housing to reduce pressure losses from transitions.

**FLOAT**

The float must be one piece and molded of high strength, impact, UV and chemical resistant, polyethylene. The float color must be black for minimum visibility in water. Stainless steel inserts must be molded into the float for light attachment and for mooring eyebolts. The float must have molded hand holds for easy handling. The float must be designed for maximum stability and for easy height adjustability to achieve minimum visibility with as little as 1/2" of a 15" diameter portion of the float visible during operation. The float must be filled with closed cell urethane foam.

**MOTOR SPECIFICATIONS**

The Aerator must have a \_\_\_\_\_ HP \_\_\_\_\_ phase motor using \_\_\_\_\_ volts and drawing \_\_\_\_\_ amps.

The motor must be an industry standard submersible motor with mechanical seal and heavy duty bearings designed to operate under water. All external components must be stainless steel.

**MOTOR WIRING**

Single phase, 1HP motors shall be 2 wire plus ground with self contained capacitors and a built in overload.

1HP, three phase motors and 2HP thru 7.5HP motors (regardless of phase) shall be 3 wire plus ground with external capacitors and manually resettable overloads in a motor control box. A motor lead connects to the motor via a waterproof plug. All motors must have a ground wire. Three phase motors all use 3 wires plus ground.

## PUMP ASSEMBLY

All pump components, including propellers, shrouds and flow straighteners must be precision molded Gelyo and Noryl resins for the highest strength and durability. The pump components must be highly streamlined to provide efficient flow path with no performance robbing sharp turns or obstacles.

1HP units must have a water intake reaching a depth of 29 inches below the surface.

2HP to 7.5HP units must have a water intake below the surface reaching a depth of 42 inches for vertical system, or 26 inches for a horizontal system.

A short motor shaft extension must be accurately attached to the motor shaft to provide a rigid and precision attachment for the propeller(s).

## INTAKE SUCTION SCREEN

1HP systems must have one non collapsible, high strength Gelyo & Noryl resin intake suction screen made with specifically engineered raised ridges to prevent collapse and prevent anything larger than a 1/4 inch sphere from entering the intake suction screen assembly. The intake suction screen assembly must have no less than 2.35 square feet of suction area of which at minimum 51% is available for water intake.

2HP to 7.5HP systems must have two non collapsible, high strength Gelyo & Noryl resin intake suction screens made with specifically engineered raised ridges to prevent collapse and prevent anything larger than a 1/4 inch sphere from entering the intake suction screen assembly. The intake suction screen assembly must have no less than 4.7 square feet of suction area of which at minimum 51% is available for water intake.

## UNDERWATER POWER CONNECTION

The electrical connector system for the pump motor must form a watertight connection between the motor lead plug and the pump cord socket. The connector must be UL/cUL/CE rated at 600 volts and 32 amps for continuous submersion to a depth of 33 feet. It must be available with either 3 or 4 pins for connection to 2 wire or 3 wire motors plus a ground. The plug shall be epoxy potted to the motor lead and the socket to the pump cord to create a permanent and watertight connection to those wires. This connector system shall allow for a fast and highly reliable system for disconnecting the Fountain for service or storage. In addition, both the plug and socket shall have waterproof caps which will allow either to remain dry when submerged while disconnected.

## UNDERWATER POWER CORD

The Power Cord must be UL listed for continuous submergence. It must be SOOW heavy duty round stranded and double insulated, copper cord. One wire in each cord must always act as a ground for proper system grounding.

The Motor Power Cord will be \_\_\_\_\_ gauge and \_\_\_\_\_ feet in length.

The Lighting Power Cord will be \_\_\_\_\_ gauge, \_\_\_\_\_ wires, and \_\_\_\_\_ feet in length.

## CONTROL PANELS

The single phase control panels must be UL rated as a Fountain Control Panel.

Control panels are contained within lockable NEMA-3R fiberglass or painted steel enclosures rated for outdoor installation.

All control panels must include a factory installed externally operated disconnect switch, circuit breaker, class A (human rated) Ground Fault Circuit Interrupter (GFCI)/ on-off switch, 24 hour timer, contactor, and output terminals. 2hp thru 5hp, single-phase motors have a motor control box inside the panel. It holds the starting relay and capacitors and keeps them away from the water. Three phase control panels must have a Motor Circuit Controller that provides on-off, overload, phase loss, and short circuit protection.

\*The National Electrical Code (NEC) and Underwriters Laboratory (UL) do not allow 460V fountain controllers. Aqua Control 460V control panels are built to UL standards but cannot be UL listed.

## FASTENERS

All fasteners must be stainless steel.

## WARRANTY

SS2 units come with a 3-year warranty. Control panel components have a 3-year warranty.

\*\*\*An optional 2-year extended warranty is available for SS2 units at the time of purchase.

## PRODUCER

This will be an Aqua Control \_\_\_\_\_ HP Select Series 2 (SS2), produced by Aqua Control, Inc., 6A Wolfer Industrial Drive, Spring Valley, IL 61362 U.S.A. Phone: 800-377-0019; Fax: 815-664-4901.